

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF



- ◇ 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface
- ◇ Power Supply :+3.3V
- ◇ Power consumption<1.5W
- ◇ Temperature Range: 0~ 70°C
- ◇ RoHS compliant

## Features:

- ◇ Supports 1.0 to 11.3Gb/s bit rates
- ◇ Hot-Pluggable
- ◇ Duplex LC connector
- ◇ 1471~1611nm CWDM EML transmitter, APD photo-detector
- ◇ 23dB optical link budget

## Applications:

- ◇ 10GBASE-ZR/ZW Ethernet
- ◇ 10G Fiber channel
- ◇ SONET OC-192/SDH STM-64
- ◇ CWDM Networks

## Description:

Kewei' KW3980D-xx is a very compact 10Gb/s optical transceiver module for serial optical communication applications at 10Gb/s. The KW3980D-xx converts a 10Gb/s serial electrical data stream to 10Gb/s optical output signal and a 10Gb/s optical input signal to 10Gb/s serial electrical data streams.

The SFP+ Module compliant with SFF-8431, SFF-8432 and IEEE 802.3ae 10GBASE-ER. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

## ● Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	T <sub>s</sub>	-40		+85	°C
Case Operating Temperature	T <sub>c</sub>	0		70	°C
Maximum Supply Voltage	V <sub>cc</sub>	-0.5		4	V
Relative Humidity	RH	0		85	%

## ● Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V <sub>cc</sub>	3.135		3.465	V	

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

Supply Current	I <sub>cc</sub>			450	mA	
Power Consumption	P			1.5	W	
<b>Transmitter Section:</b>						
Input differential impedance	R <sub>in</sub>		100		Ω	1
Tx Input Single Ended DC Voltage Tolerance (Ref V <sub>eeT</sub> )	V	-0.3		4	V	
Differential input voltage swing	V <sub>in,pp</sub>	180		700	mV	2
Transmit Disable Voltage	V <sub>D</sub>	2		V <sub>cc</sub>	V	3
Transmit Enable Voltage	V <sub>EN</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	
<b>Receiver Section:</b>						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	V <sub>o</sub>	300		850	mV	
Rx Output Rise and Fall Time	Tr/Tf	30			ps	4
LOS Fault	V <sub>LOS fault</sub>	2		V <sub>ccHOST</sub>	V	5
LOS Normal	V <sub>LOS norm</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	5

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. 20% ~ 80%
5. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1.

## ● Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
<b>Transmitter Section:</b>						
Center Wavelength	λ <sub>c</sub>	λ-6.5		λ+6.5	nm	
spectral width	Δλ			1	nm	
Average Optical Power	P <sub>avg</sub>	0		+5.5	dBm	1
Laser Off Power	P <sub>off</sub>			-30	dBm	
Extinction Ratio	ER	6			dB	
Transmitter Dispersion Penalty	TDP			3.0	dB	
Relative Intensity Noise	R <sub>in</sub>			-128	dB/Hz	2
Optical Return Loss Tolerance		20			dB	
<b>Receiver Section:</b>						
Center Wavelength	λ <sub>r</sub>	1460		1620	nm	
Receiver Sensitivity(OMA)	Sen			-23	dBm	3
Stressed Sensitivity (OMA)	Sen <sub>ST</sub>			-21	dBm	3
Los Assert	LOS <sub>A</sub>	-35		-	dBm	
Los De-assert	LOS <sub>D</sub>			-24	dBm	
Los Hysteresis	LOS <sub>H</sub>	0.5			dB	
Overload	Sat	-7			dBm	4
Receiver Reflectance	R <sub>rx</sub>			-12	dB	


Note:

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

1. Average power figures are informative only, per IEEE802.3ae.
2. 12dB reflection.
3. Measured at 10.3125Gb/s with PRBS  $2^{31} - 1$  NRZ test pattern for BER  $< 1 \times 10^{-12}$
4. Receiver overload specified in OMA and under the worst comprehensive stressed condition.

## ● Pin Assignment

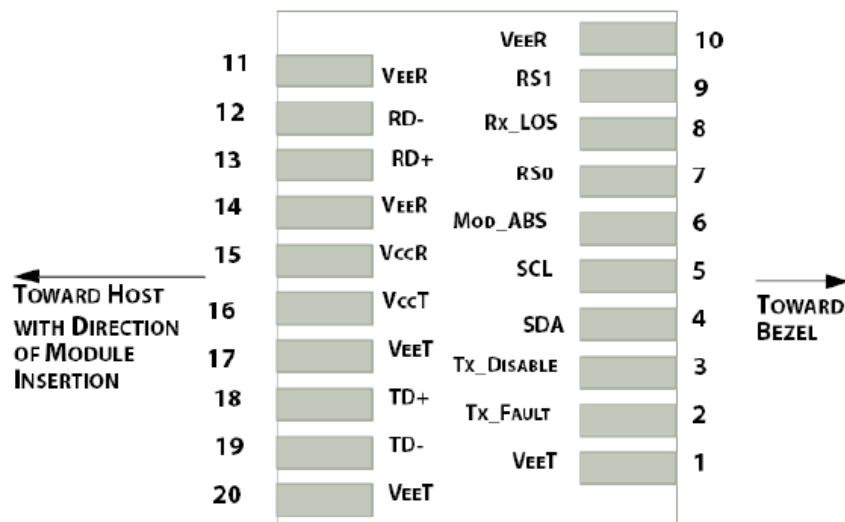

## ● Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0, No Function Implement	
8	LOS	Receiver Loss of Signal Indication	4
9	RS1	Rate select1, No Function Implement	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	1

Note:

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

- 1.The module ground pins shall be isolated from the module case.
- 2.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host\_Vcc on the host board.
- 3.This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
- 4.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host\_Vcc on the host board.

## ● SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h.


The memory is mapped in Table 1.

Detailed ID information (A0h) is listed in Table 2.

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

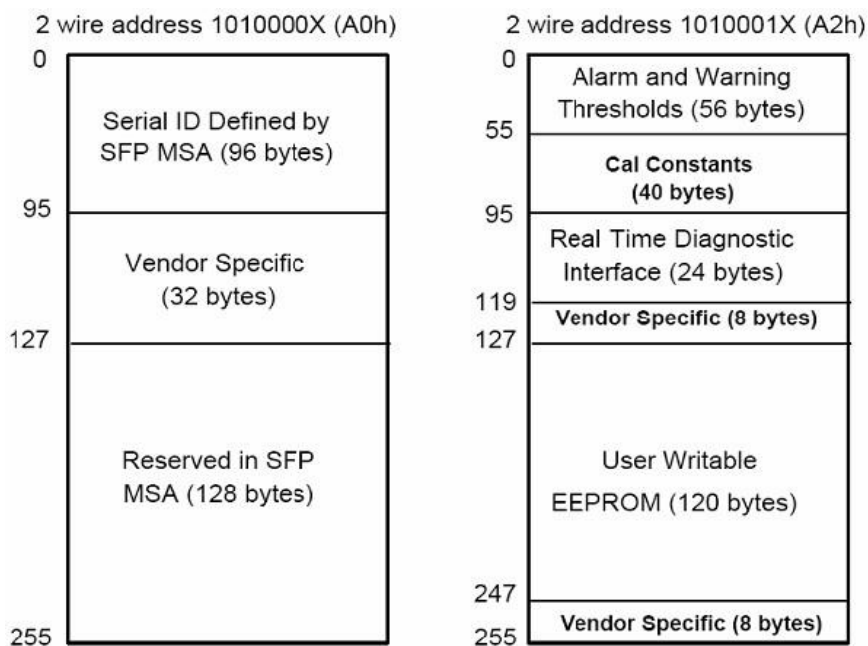

**Table 2 - EEPROM Serial ID Memory Contents (A0h)**

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	10G Base-ZR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: KEWEI
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "KW3980D-XX" (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date code	Kewei's Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	KEWEI specific date, read only
128-255	128	Reserved	Reserved for SFF-8079

## ● Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±10	%
102-103	Tx Output Power	±3.0	dB
104-105	Rx Input Power	±3.0	dB

## ● Regulatory Compliance

The KW3980D-xx complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).


Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11	Compatible with Class 1 laser

# 10G SFP+ CWDM Transceiver (KW3980D-xx)


Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

	EN60950, EN (IEC) 60825-1,2	product.
--	-----------------------------	----------

## ● Recommended Circuit

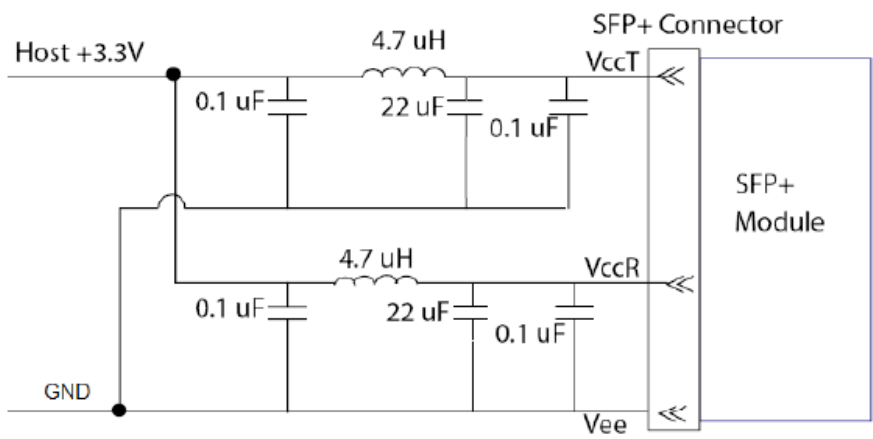

**Recommended Host Board Power Supply Circuit**

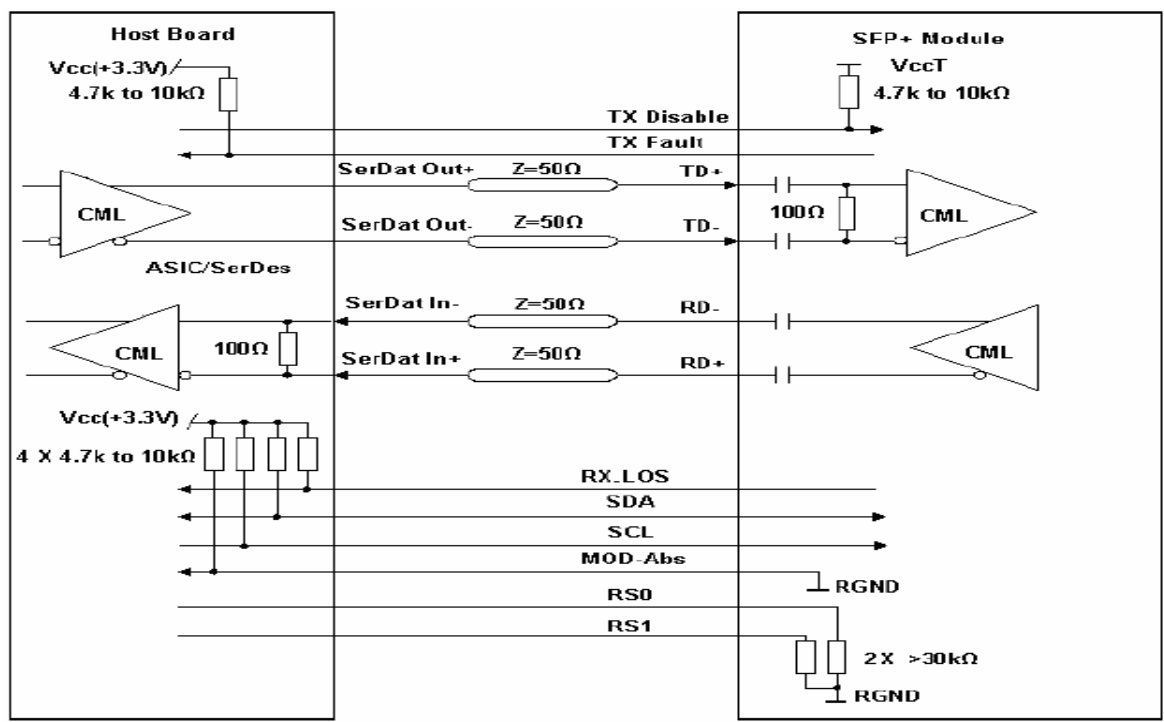


**Recommended High-speed Interface Circuit**

# 10G SFP+ CWDM Transceiver (KW3980D-xx)

Hot Pluggable, Duplex LC, +3.3V, 1471~1611nm, CWDM EML&APD, SMF

## ● Mechanical Dimensions

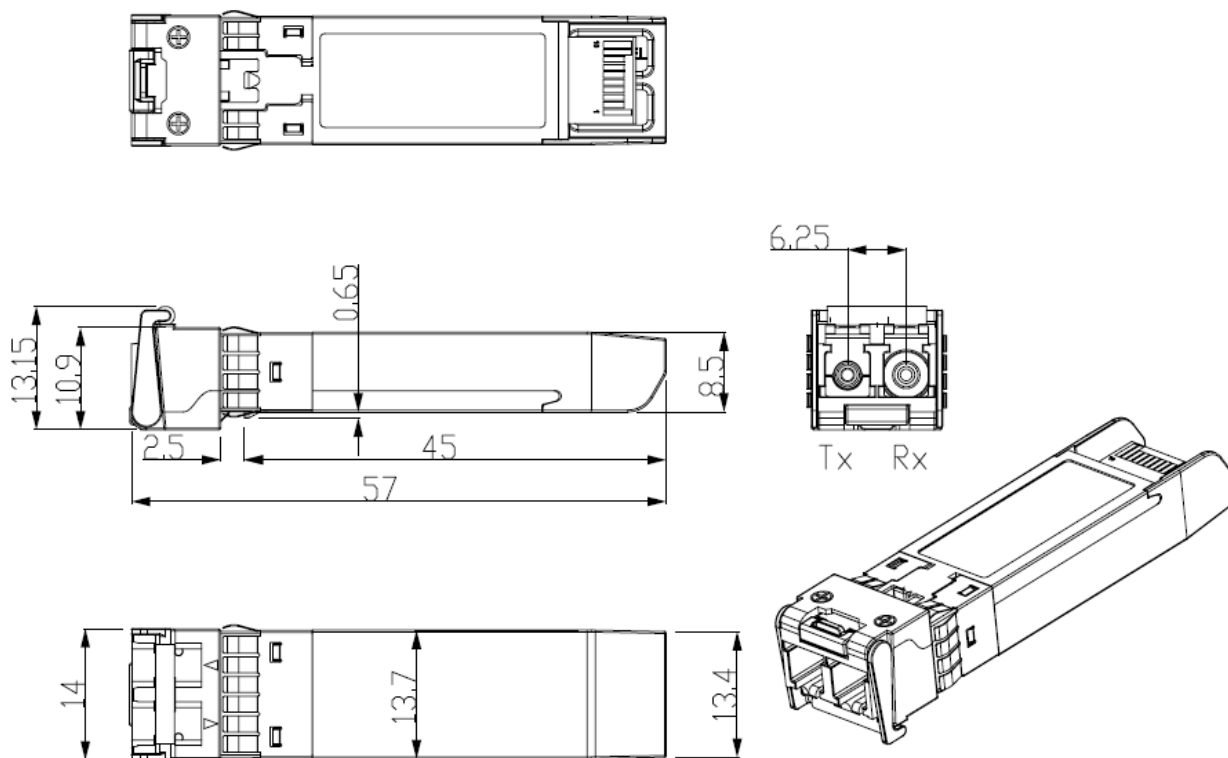

## ● Order Information

Part No.	Data Rate	Central wavelength	Optical Link budget	Recommend Distance
KW3980D-47	10Gbps	1471nm	23dB	80km
KW3980D-49	10Gbps	1491nm	23dB	80km
KW3980D-51	10Gbps	1511nm	23dB	80km
KW3980D-53	10Gbps	1531nm	23dB	80km
KW3980D-55	10Gbps	1551nm	23dB	80km
KW3980D-57	10Gbps	1571nm	23dB	70km
KW3980D-59	10Gbps	1591nm	23dB	70km
KW3980D-61	10Gbps	1611nm	23dB	70km

Kewei reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Kunshan Kewei Fiber Communications Equipment Co., Ltd.

Copyright © KEWEI

All Rights Reserved